



ADVENT

Technologies, LLC

Honey Badger™ & UltraCell™ Fuel Cells

MADE IN THE USA

ClIC-It Cartridge Re-filler

PN: ACA0004

MOBILE REFILLING SYSTEM FOR DEMANDING APPLICATIONS




RE-FILLER SYSTEM

OPERATIONAL MODES	AC Source / DC Source / OFF
CONTROL MODES	Fill / Evacuate / Stop
AC INPUT VOLTAGE	85-265 VAC / 47-440Hz
DC INPUT VOLTAGE	12-30 VDC
COMPATIBLE CARTRIDGES	ULTRACELL 550CC / XRT75
POWER CONSUMPTION	50W
COLOR	Green

PHYSICAL SPECIFICATIONS

ELECTRICAL INPUT CONNECTORS	GLENAIR 807-895-07ZNU6-7SY EMPHENOL 97-3102A-18-10P 3-PRONG AC POWER ENTRY COLDER PMCD4201
FUEL INPUT CONNECTOR	COLDER PMCD4201
DIMENSIONS	13.2" x 9.8" x 7.5" (33.5cm x 24.9cm x 19.0cm)
WEIGHT	18.5 LB (8.4 KG)

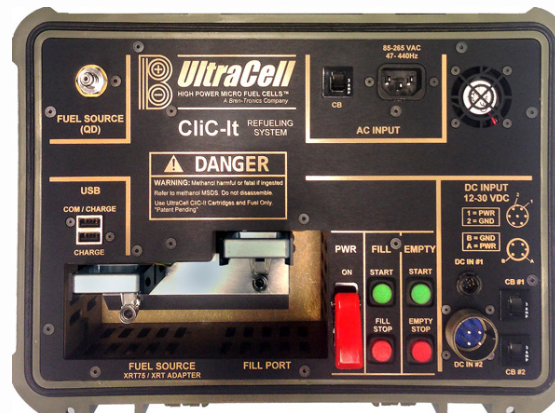


ENVIRONMENTAL REQUIREMENTS

OPERATING TEMPERATURE	-22°F to +122°F (-30°C to +50°C)
STORAGE TEMPERATURE	-40°F to +140°F (-40°C to +60°C)

PERFORMANCE

CARTRIDGE	PART NUMBER	REFILLING TIME (MINUTES)
550 CC	CR011051	10
XRT75	CR011052	23

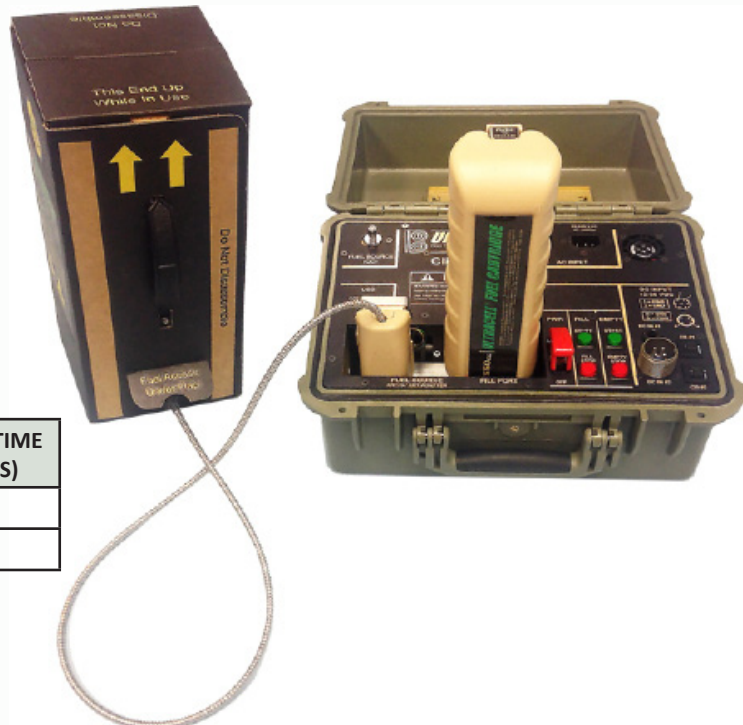

ADVENT TECHNOLOGIES, LLC
 5637 La Ribera Street Suite A Livermore CA 94550 USA
 Tel: (925) 455-9400 Fax: (925) 455-7750
 www.ultracell-llc.com sales@ultracell-llc.com